

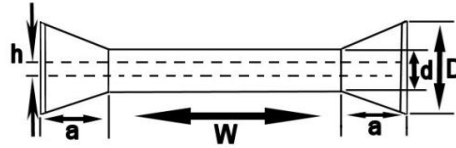


**HM Wire International, Inc.**  
**Ph: 330-244-8501 Fax: 330-244-8561**  
**www.litz-wire.com info@litz-wire.com www.hmwire.com**



Symbol	Wire Range	D	d	W	a	h	Capacity (kg)
OR- 1.5K	0.05 mm  (0.05 mm Max.)	106 ± 0.3	76 ± 0.3	75 ± 0.3	18.5 ± 0.3	20 ± 0.5	1.5
OR- 2K		112 ± 0.4	70 ± 0.4	116 ± 0.4	25 ± 0.2	20 ± 0.5	2
PL- 4S		135 ± 0.5	80 ± 0.5	110 ± 0.5	32.5 ± 0.3	20 ± 0.5	4
PL- 600S		88 ± 0.3	68 ± 0.3	79 ± 0.3	13.5 ± 0.2	16 ± 0.5	0.6
PL- 1000S		106 ± 0.3	82 ± 0.3	80 ± 0.3	16 ± 0.2	20 ± 0.5	1
HKV125		125 ± 0.5	71 ± 0.4	64 ± 0.4	30 ± 0.3	16 ± 0.5	3.5



Symbol	Wire Range	D1	D2	d1	d2	W1	W2	h	Capacity (kg)
PL-3G	0.02 - 0.025	68 ± 0.2	-	44 ± 0.2	-	79.5 ± 0.2	89 ± 0.3	16 + .05	0.3
PL-5G	0.03 - 0.04	75 ± 0.2	-	50 ± 0.2	-	80 ± 0.2	96 ± 0.5	20 + .05	0.5
P-3	0.17 - 0.25	130 ± 0.2	-	59.5±0.2	-	90 ± 0.2	110 ± 0.5	20.5+.05	3
PT-1	0.04 - 0.06	95 ± 0.2	104 ± 0.2	53 ± 0.2	58 ± 0.2	100 ± 0.2	120 + .05	21 + .05	1.5
PT-2	0.05 - 0.08	105 ± 0.2	115 ± 0.2	60 ± 0.2	67 ± 0.2	150 ± 0.2	170 + .05	21 + .05	2
PT-4	0.06 - 0.16	124 ± 0.2	139.5±0.3	75 ± 0.2	87 ± 0.2	172 ± 0.3	202 + .05	26 + .05	4
PT-10	0.17 - 0.25	160 ± 0.3	180 ± 0.3	96 ± 0.3	110 ± 0.3	202 ± 0.3	232 + .05	30 + .05	10
PT-15	0.17 - 0.3	180 ± 0.3	200 ± 0.3	96 ± 0.3	110 ± 0.3	200 ± 0.3	230 + .05	30 + .05	15
PT-18	0.2 - 0.8	204 ± 0.4	223 ± 0.4	121 ± 0.3	134 ± 0.3	200 ± 0.3	230 + .05	30 + .05	18
PT-25	0.25 - 1.2	215 ± 0.5	230 ± 0.4	110 ± 0.3	130 ± 0.3	250 ± 0.5	280 + .05	30 + .05	25
PT-60	0.3 - 1.2	270 ± 1	300 ± 1	150 ± 1	170 ± 1	350 ± 1	400 ± 1	100+ .05	60
PT-90	0.3 - 1.2	300 ± 1	315 ± 1	180 ± 1	200 ± 1	425 ± 1	500 ± 1	100+ .05	90
PT-190	0.3 - 1.2	370 ± 1	400 ± 1	224 ± 1	250 ± 1	530 ± 2	630 ± 2	100+ .05	190
PT-270	0.3 - 1.2	435 ± 1	460 ± 1	255 ± 1	280 ± 1	530 ± 2	630 ± 2	100+ .05	270
P-60	Rectangular	440	-	300	-	200	235	52	60
P-100	Copper	485	-	300	-	195	250	124	100
P-200	Wire	605	-	350	-	153	203	38	200

\*to be used as a guideline\*

Copyright HM Wire International Inc. 2009

R1.02.10.09